




# Kodiak 66" #43 lb @28"

Allungo AMO	Allungo netto	Carico (Lb)	Incremento Libbre-Pollici
9,00	7,25		
10,00	8,25	4,94	4,94
11,00	9,25	8,14	3,20
12,00	10,25	10,87	2,73
13,00	11,25	13,27	2,40
14,00	12,25	15,57	2,30
15,00	13,25	17,68	2,11
16,00	14,25	19,58	1,90
17,00	15,25	21,39	1,81
18,00	16,25	23,19	1,80
19,00	17,25	25,13	1,94
20,00	18,25	26,79	1,66
21,00	19,25	28,64	1,85
22,00	20,25	30,51	1,87
23,00	21,25	32,41	1,90
24,00	22,25	34,33	1,92
25,00	23,25	36,44	2,11
26,00	24,25	38,47	2,03
27,00	25,25	40,70	2,23
28,00	26,25	43,06	2,36
29,00	27,25	45,57	2,51
30,00	28,25	48,17	2,60

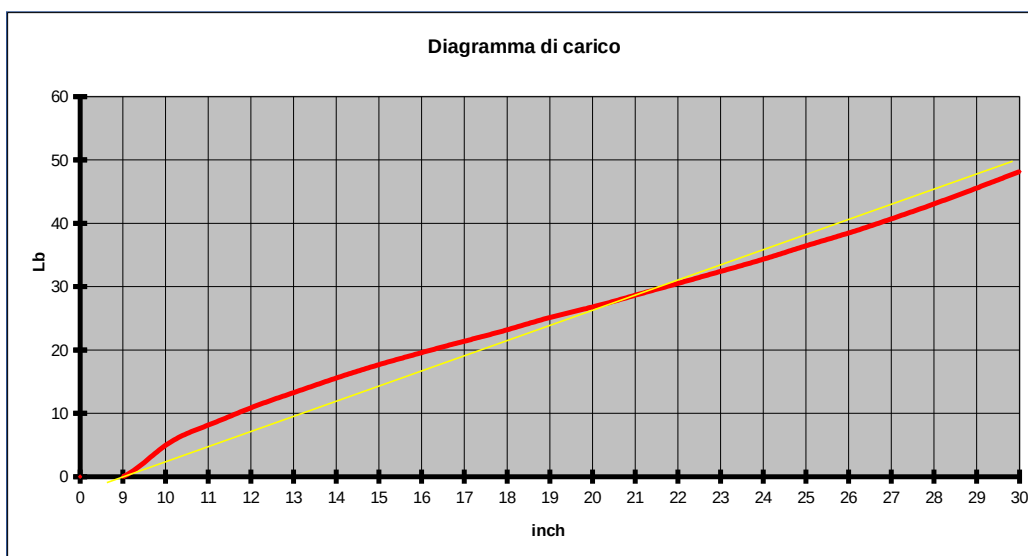

Brace utilizzato 7<sup>1</sup>/<sub>4</sub>

Brace Consigliato da 7" a 7<sup>1</sup>/<sub>4</sub>.

	Ft Lb	Joule (N m)
E.pot (28")	37,5	50,8

peso della freccia		Rapporto Sicurezza
grains	grammi	Grains/lb
447	29,0	10,4

Velocità di uscita Rilevata	
ft/s	m/s
170	55,8

E.c
Joule
45,1

Rendimento	
E.c/E.pot.	
88,7%	
Massa Virtuale	Grains
	57,2

