




Poseidon 64" #36 lb @28"

Allungo AMO	Allungo netto	Carico (Lb)	Incremento Libbre-Pollici.
0	0	0	
9,00	7,25	0,00	
10,00	8,25	3,02	3,02
11,00	9,25	6,22	3,20
12,00	10,25	8,86	2,64
13,00	11,25	11,18	2,32
14,00	12,25	13,14	1,96
15,00	13,25	15,08	1,94
16,00	14,25	16,76	1,68
17,00	15,25	18,37	1,61
18,00	16,25	19,91	1,54
19,00	17,25	21,45	1,54
20,00	18,25	22,97	1,52
21,00	19,25	24,54	1,57
22,00	20,25	26,06	1,52
23,00	21,25	27,56	1,50
24,00	22,25	29,17	1,61
25,00	23,25	30,87	1,70
26,00	24,25	32,63	1,76
27,00	25,25	34,42	1,79
28,00	26,25	36,38	1,96
29,00	27,25	38,47	2,09
30,00	28,25	40,68	2,21

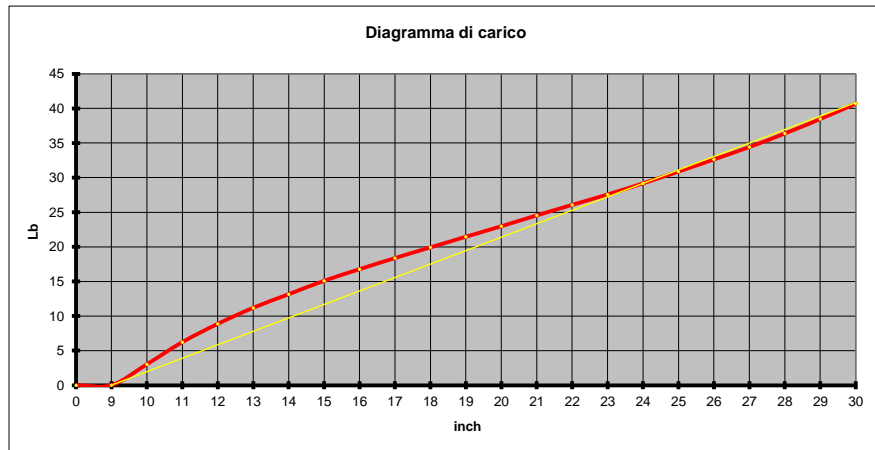

Brace utilizzato 7³/₄.

Brace consigliato da 7³/₄ a 8".

E.pot (28")	Ft Lb	Joule (N m)
	31,7	43,0

peso della freccia		Rapporto Sicurezza
grains	grammi	Grains/lb
430	27,9	11,8

Velocità di uscita Rilevata	
ft/s	m/s
165	54,1

E.c
Joule
40,8

Rendimento E.c/E.pot.	
95,0%	
Massa	Grains
Virtuale	22,8

