




Orion 66" #40 lb @28"

Allungo AMO	Allungo netto	Carico (Lb)	Incremento Libbre-Pollici
0	0	0	
9,00	7,25	0,00	
10,00	8,25	4,59	4,59
11,00	9,25	7,45	2,86
12,00	10,25	9,99	2,54
13,00	11,25	12,21	2,22
14,00	12,25	14,24	2,03
15,00	13,25	16,12	1,88
16,00	14,25	17,90	1,78
17,00	15,25	19,62	1,72
18,00	16,25	21,30	1,68
19,00	17,25	22,97	1,67
20,00	18,25	24,58	1,61
21,00	19,25	26,30	1,72
22,00	20,25	28,00	1,70
23,00	21,25	29,74	1,74
24,00	22,25	31,59	1,85
25,00	23,25	33,49	1,90
26,00	24,25	35,45	1,96
27,00	25,25	37,48	2,03
28,00	26,25	39,95	2,47
29,00	27,25	42,00	2,05
30,00	28,25	44,50	2,50

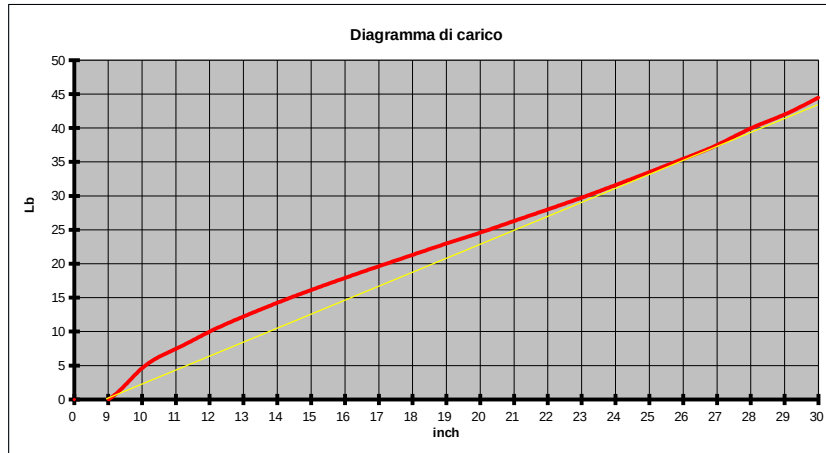

Brace Utilizzato 7"¼

Brace consigliato da 7" a 7"¼.

	Ft Lb	Joule (N m)
E.pot (28")	34,4	46,7

peso della freccia		Rapporto Sicurezza
grains	grammi	Grains/lb
447	29,0	11,2

Velocità di uscita Rilevata	
ft/s	m/s
166	54,5

E.c
Joule
43,0

Rendimento	
E.c/E.pot.	
92,0%	
Massa Virtuale	Grains
	38,7

